

Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------


DESCRIPTION

Suitable for any retrofit or new building application, easy to install.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Damp-location rated, suitable for residential lighting such as kitchens, bedrooms, bathrooms, living rooms, etc. It is also suitable for commercial buildings such as offices, hotels, corridors, conference rooms, restaurants, subway stations, etc

Available size: 4", 6"

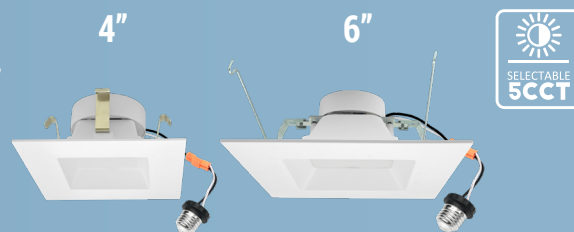

BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
EE4SD10W-5CCT	4inch	10W	2700K	820Lm
			3000K	
			3500K	
			4000K	
			5000K	
MODEL#	SIZE	WATTAGE	5CCT	LUMENS
EE6SD15W-5CCT	6inch	15W	2700K	1250Lm
			3000K	
			3500K	
			4000K	
			5000K	

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	AL+PC
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F ~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

FEATURES

- Perfect for retrofit jobs
- No tools required for installation
- Emits evenly, without halo or shadows
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Built-in Driver

INSTALLATION

Fit in 4, 6 inch compatible housing cans directly, no additional accessories are required.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS


80% more energy savings than halogen lamps.

LISTING


ETL Listed. Energy Star. Title24.




Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

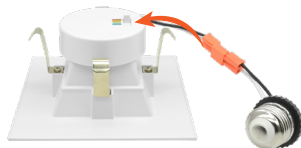

Selectable CCT
2700K,3000K,3500K,4000K,5000K

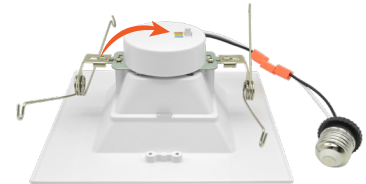

SIZE & DIMENSION

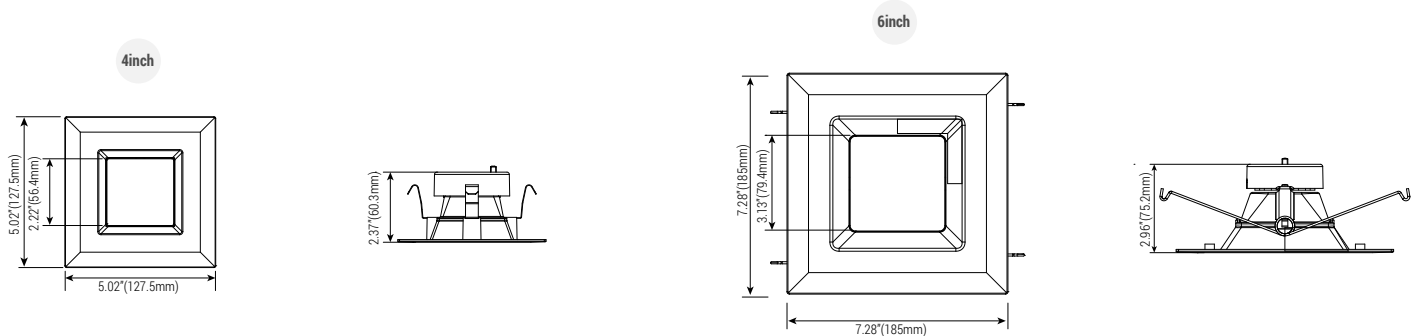

RECOMMENDED DIMMER

LUTRON		LEVITON
TG-600PR-WH	SCL-153PH-WH	
S-600PR-WH	GT-600P	6672
CTCL-153PDH-WH	DVCL-153P	6674
TGCL-153PH-LA	MSCL-OP153M	IPL06
SLV-600P-AL	PD-6WCL	DSL06
DV-600PR-WH	MACL-153M//MA-R	RNL06

ACCESSORIES



E26 Adapter